
# K-FI METALLBEHAEL SICHT H G

Filters with metal bowl, sight glass and »HW« mounting bracket, semi-automatic drain valve

## Properties

| | |
|---|---|
| **Input pressure** | Max. 10 bar |
| **Media temperature** | max. 70 °C |
| **Ambient temperature** | Max. 70 °C |
| **Working pressure** | 1.5 - 9 bar |
| **Pore size in filter element** | 5 µm |
| **Sealant** | NBR |
| **Housing** | Die-cast aluminium |
| **Drain valve** | Semi- or fully-automatic |
| **Flow rate measurement** | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |
| **More information** | User manual on request |



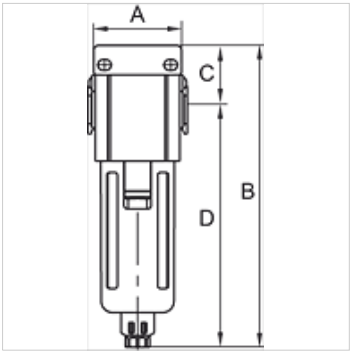


## Item

| Identification | Thread | Flow rate (L/min) | A (mm) | B | C (mm) | D (mm) | Size |
|---|---|---|---|---|---|---|---|
| **K- 07 25 06 45** | G 3/4 | 7800 | 85,0 | 256,0 mm | 37,0 | 219,0 | 3 |
| **K- 07 25 06 47** | G 1 | 7800 | 85,0 | 256,0 mm | 37,0 | 219,0 | 3 |

## Accessories

| | |
|---|---|
| **K-ERSATZBEHAELTER G UND G-MINI POLY** | Spare tanks »G« Series and »G-mini« Series Polycarbonat |
| **K-SCHUTZKORB G** | Protective cage |
| **K-FILTERELEMENT** | Filter element |
| **K-HALTERBAUSATZ** | Holder |
| **K-VERBINDUNGELEMENTE** | Connecting sets |
| **K-WANDHALTER** | Wall bracket |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*