



K-L-STECKVER DREH MINI

Male elbows, swivel type, mini

HANSA FLEX

Properties

Working pressure	Max. 10 bar, vacuum
Application	Air, vacuum
Recommended hoses	PU or PA (nylon)
Media	Compressed air
Standard	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring R thread acc. to ISO 7-1, thread coating
Temp. range	0 °C to +60 °C
Sealing surface	O-ring (NBR)
Material	Plastic, Nickel plated brass
Contact pressure ring	Plastic

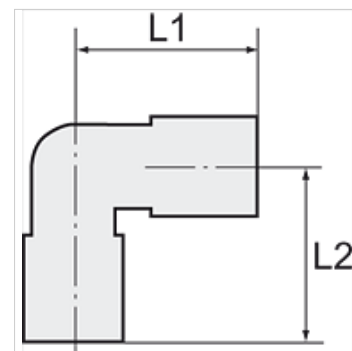

Note

Further information on request

Description

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Item					
Identification	Thread	for external hose Ø	L1 (mm)	L2 (mm)	AF
K- 07 40 23 43	M 3	3 mm	12,0	16,0	8 mm
K- 07 40 23 44	M 3	4 mm	14,0	17,2	8 mm
K- 07 40 23 45	M 5	3 mm	12,0	16,0	8 mm
K- 07 40 23 46	M 5	4 mm	14,0	17,2	8 mm
K- 07 40 23 47	M 5	6 mm	16,0	17,2	8 mm
K- 07 40 23 48	M 6	3 mm	12,0	16,5	10 mm
K- 07 40 23 49	M 6	4 mm	14,0	17,6	10 mm
K- 07 40 23 50	M 6	6 mm	16,0	17,6	10 mm
K- 07 40 23 51	G 1/8	4 mm	14,0	16,5	13 mm
K- 07 40 23 52	G 1/8	6 mm	16,0	16,5	13 mm
K- 07 40 23 65	R 1/8	4 mm	14,0	18,0	10 mm
K- 07 40 23 66	R 1/8	6 mm	16,0	18,0	10 mm
K- 07 40 50 05	M 7	4 mm	14,0	15,7	10 mm
K- 07 40 50 06	M 7	6 mm	16,3	17,2	10 mm