

K-T-STECK VB RED MINI

Union tees, unequal, mini

HANSA FLEX

Properties

Working pressure Max. 10 bar, vacuum

Application Air, vacuum

Recommended hoses PU or PA (nylon)


Media Compressed air

Temp. range 0 °C to +60 °C

Material Plastic, Nickel plated brass

Contact pressure ring Plastic

Pneumatic Type

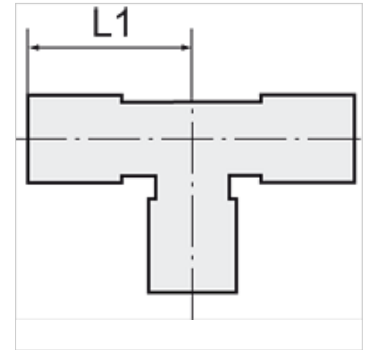

Note

Further information on request

Description

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Item

Identification	for external hose \varnothing	L1 (mm)
K- 07 40 50 03		14,7
K- 07 40 50 04		16,4