


# K-VSTO PP

## Plugs

### Properties

<b>Working pressure</b>	on request
<b>Operating temperature</b>	Max. +20 °C
<b>Material</b>	Polypropylene (PP)
<b>Sealant</b>	NBR

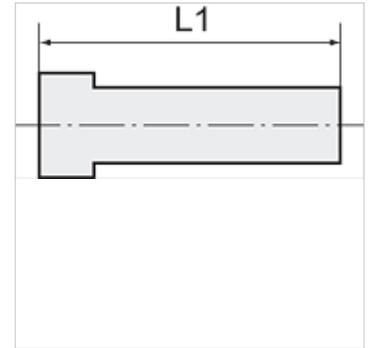

### Note

Further information on request

### Description

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

### Item

Identification	L1 (mm)	Nozzle (mm)
K- 07 40 29 21	102,0	32