


# K-VSTO PP

Plugs



Properties	
Working pressure	on request
Operating temperature	Max. +20 °C
Material	Polypropylene (PP)
Sealant	NBR

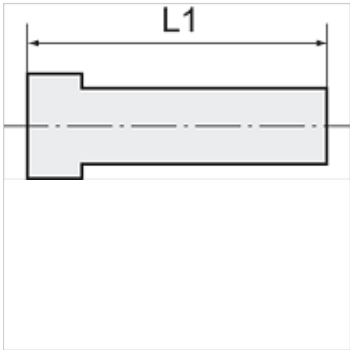

**Note**  
Further information on request

**Description**  
Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Item		
Identification	L1 (mm)	Nozzle (mm)
K- 07 40 29 21	102,0	32