



K-ODER-VENTIL

OR valves

HANSA FLEX

Properties

Operating pressure	2 - 10 bar
Temp. range	-10 °C to +80 °C
Flow rate at 6,3 bar and 1 bar	500 NI/min (G 1/8), 1300 NI/min (G 1/4)
Valve body	Aluminium
Ball	Stainless steel
Seals	NBR

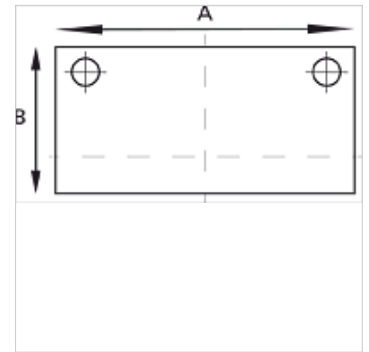

Note

Further information on request

Description

The valve has two inlets and one outlet. A signal appears at the outlet when the left or right inlet is pressurised.
If the pressure at the two inlets is different, the stronger of the two signals appears at the outlet.

Item

Identification	Thread	A (mm)	B (mm)
K- 07 15 26 05	3 x G 1/8	36,0	20,0
K- 07 15 26 04	3 x G 1/4	43,0	25,0