


K-SCHALDAE SINTERBR GE MS

Silencers, sintered bronze, with brass hexagon nut and brass thread

HANSA**FLEX**

Properties

| | |
|-----------------------|-------------------|
| Operating pressure | Max. 10 bar |
| Operating temperature | -10 °C to +200 °C |
| sound level 6bar | 80 ~ 90 dB(A) |

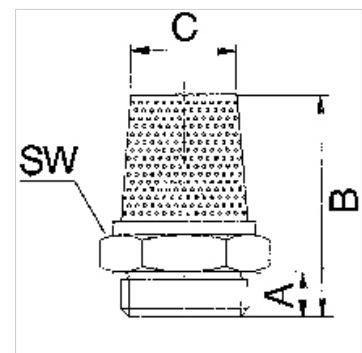

Description

For reducing the exhaust noise generated by pneumatic equipment.

Item

| Identification | Thread | A (mm) | B (mm) | C (mm) | AF |
|----------------|--------|-----------|-----------|-----------|-------|
| K-07 40 35 11 | M 5 | 5,0 | 20,8 | 4,0 | 9 mm |
| K-07 40 35 12 | G 1/8 | 5,5 | 22,8 | 8,0 | 13 mm |
| K-07 40 35 13 | G 1/4 | 7,0 | 33,5 | 10,0 | 17 mm |
| K-07 40 35 14 | G 3/8 | 9,0 | 41,7 | 14,0 | 22 mm |
| K-07 40 35 15 | G 1/2 | 10,0 | 48,5 | 18,0 | 24 mm |