


# K-L-MEHRFACHVERT 4 DR AGR-K

Multiple union elbows with outer hex, 4 outlets, swivel type, conical male thread, coated

**HANSA FLEX**

## Properties

|                              |                                                                                |
|------------------------------|--------------------------------------------------------------------------------|
| <b>Working pressure</b>      | Max. 15 bar, coarse vacuum                                                     |
| <b>Application</b>           | Air, vacuum                                                                    |
| <b>Recommended hoses</b>     | PU or PA (nylon)                                                               |
| <b>Media</b>                 | Compressed air and all gases or liquids that are compatible with the materials |
| <b>Temp. range</b>           | -20 °C to +80 °C                                                               |
| <b>Sealing surface</b>       | Conical version: thread coating                                                |
| <b>Material</b>              | Plastic, Nickel plated brass                                                   |
| <b>Contact pressure ring</b> | Plastic                                                                        |

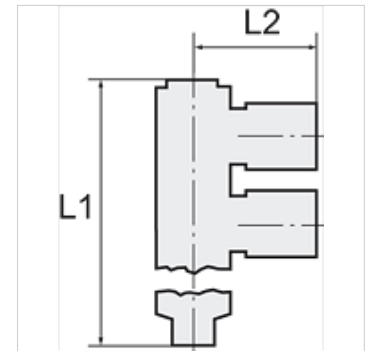

## Note

Further information on request

## Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

| Item           |        |                     |            |            |       |
|----------------|--------|---------------------|------------|------------|-------|
| Identification | Thread | for external hose Ø | L1<br>(mm) | L2<br>(mm) | AF    |
| K- 07 40 43 37 | R 1/8  | 6 mm                | 38,5       | 24,0       | 12 mm |
| K- 07 40 43 38 | R 1/8  | 8 mm                | 41,6       | 28,5       | 14 mm |
| K- 07 40 43 35 | R 1/4  | 6 mm                | 40,5       | 24,0       | 14 mm |
| K- 07 40 43 36 | R 1/4  | 8 mm                | 43,6       | 28,5       | 14 mm |
| K- 07 40 43 34 | R 1/4  | 10 mm               | 52,8       | 33,7       | 19 mm |
| K- 07 40 43 39 | R 3/8  | 10 mm               | 53,8       | 33,7       | 19 mm |
| K- 07 40 43 40 | R 3/8  | 12 mm               | 61,0       | 37,5       | 24 mm |
| K- 07 40 43 33 | R 1/2  | 12 mm               | 64,0       | 37,5       | 24 mm |