



# K-KFE-BKR

KFE-ball valves

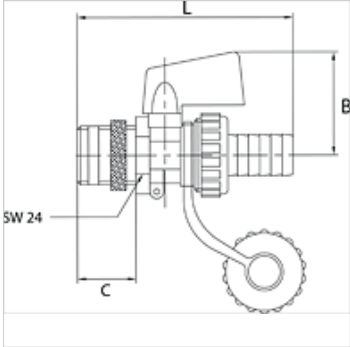

| Properties                     |               |
|--------------------------------|---------------|
| Operating pressure             | Max. 10 bar   |
| Media temperature              | max. +110 °C  |
| Stem                           | I.D. 13       |
| Hand lever                     | Die cast zinc |
| Ball, cutting ring seal        | PTFE          |
| spindle seal, hose nozzle, cap | EPDM          |

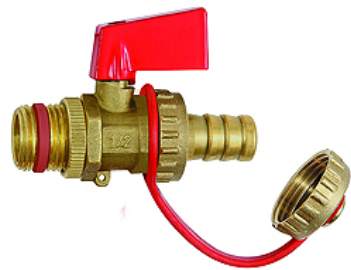

**Note**  
Further information on request

**Description**  
Boiler, filling and drain valves for heating systems.

| Item           |        |           |           |           |                                 |
|----------------|--------|-----------|-----------|-----------|---------------------------------|
| Identification | Thread | B<br>(mm) | C<br>(mm) | L<br>(mm) | Material                        |
| K- 07 30 30 34 | G 1/2  | 37,0      | 20,0      | 74,6      | Brass with a bare metal surface |
| K- 07 30 30 35 | G 1/2  | 37,0      | 20,0      | 74,6      | Nickel-plated brass             |