



K-KFE-BKR

KFE-ball valves

HANSA FLEX

Properties

Operating pressure	Max. 10 bar
Media temperature	max. +110 °C
Stem	I.D. 13
Hand lever	Die cast zinc
Ball, cutting ring seal	PTFE
spindle seal, hose nozzle, cap	EPDM

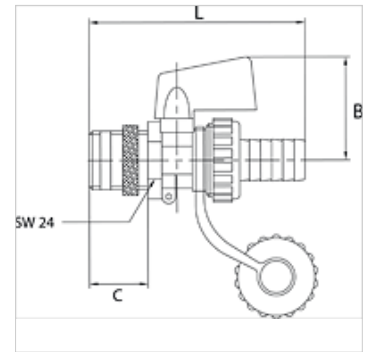

Note

Further information on request

Description

Boiler, filling and drain valves for heating systems.

Item

Identification	Thread	B (mm)	C (mm)	L (mm)	Material
K- 07 30 30 34	G 1/2	37,0	20,0	74,6	Brass with a bare metal surface
K- 07 30 30 35	G 1/2	37,0	20,0	74,6	Nickel-plated brass