



K-KFE-BKR

KFE-ball valves

HANSA FLEX

Properties

| | |
|--------------------------------|---------------|
| Operating pressure | Max. 10 bar |
| Media temperature | max. +110 °C |
| Stem | I.D. 13 |
| Hand lever | Die cast zinc |
| Ball, cutting ring seal | PTFE |
| spindle seal, hose nozzle, cap | EPDM |

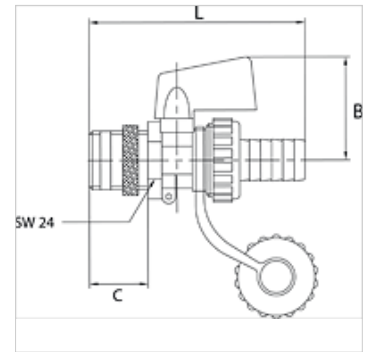

Note

Further information on request

Description

Boiler, filling and drain valves for heating systems.

Item

| Identification | Thread | B (mm) | C (mm) | L (mm) | Material |
|----------------|--------|-----------|-----------|-----------|---------------------------------|
| K- 07 30 30 34 | G 1/2 | 37,0 | 20,0 | 74,6 | Brass with a bare metal surface |
| K- 07 30 30 35 | G 1/2 | 37,0 | 20,0 | 74,6 | Nickel-plated brass |