


# K-STECKVERSCHR IG SK

Male connectors, parallel female thread with outer hex

**HANSA****FLEX**

## Properties

|                       |                     |
|-----------------------|---------------------|
| Working pressure      | Max. 16 bar         |
| Operating temperature | -20 °C to +80 °C    |
| Material              | Nickel-plated brass |
| Contact pressure ring | Hostaform           |
| Clamping ring         | Stainless steel     |

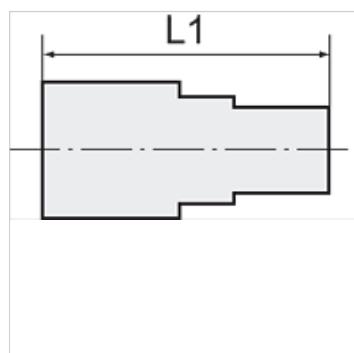

## Note

Further information on request

## Description

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Item

| Identification | Thread | for external hose Ø | L1<br>(mm) | AF    |
|----------------|--------|---------------------|------------|-------|
| K-07 40 25 06  | M 5    | 3 mm                | 15,7       | 7 mm  |
| K-07 40 25 12  | G 1/8  | 4 mm                | 26,2       | 10 mm |
| K-07 40 25 13  | G 1/8  | 5 mm                | 27,5       | 12 mm |
| K-07 40 25 14  | G 1/8  | 6 mm                | 27,1       | 12 mm |
| K-07 40 25 15  | G 1/8  | 8 mm                | 28,1       | 13 mm |
| K-07 40 25 09  | G 1/4  | 4 mm                | 28,6       | 10 mm |
| K-07 40 47 15  | G 1/4  | 5 mm                | 29,5       | 12 mm |
| K-07 40 25 10  | G 1/4  | 6 mm                | 29,3       | 12 mm |
| K-07 40 25 11  | G 1/4  | 8 mm                | 30,0       | 14 mm |
| K-07 40 25 08  | G 1/4  | 10 mm               | 31,8       | 16 mm |
| K-07 40 25 16  | G 3/8  | 10 mm               | 36,8       | 16 mm |
| K-07 40 25 17  | G 3/8  | 12 mm               | 37,0       | 19 mm |
| K-07 40 25 07  | G 1/2  | 12 mm               | 40,5       | 19 mm |