



K-W90 SVB POLYPROPYLETEN

Bulkhead elbow couplings - polypropylene



Properties

| | |
|-----------------------|-------------------------------------------------------------------------------------|
| Operating pressure | Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 2.5 bar (at 90 °C) |
| Material | Polypropylene (PP) |
| Operating temperature | Max. 90 °C |

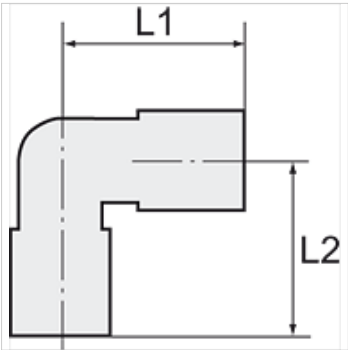

Note

Further information on request

Description

Chemically resistant to almost all inorganic acids and bases, even in high concentrations and at temperatures greater than 90 °C.

Item

| Identification | for hose | Thread | L1 (mm) | L2 (mm) | AF |
|----------------|--------------|------------|------------|------------|-------|
| K- 07 40 41 75 | 4 mm / 6 mm | M 10 x 1 | 43,0 | 25,0 | 14 mm |
| K- 07 40 41 76 | 6 mm / 8 mm | M 14 x 1.5 | 53,0 | 33,0 | 19 mm |
| K- 07 40 41 77 | 8 mm / 10 mm | M 16 x 1.5 | 58,0 | 36,0 | 22 mm |
| K- 07 40 41 78 | 9 mm / 12 mm | M 18 x 1.5 | 67,0 | 43,0 | 24 mm |