


# K-T-MEHRF-VERT 4 DREH

Tee distributors with inner hex, 4 outlets, swivel type, parallel male thread with O-ring



| Properties            |                                                                                |
|-----------------------|--------------------------------------------------------------------------------|
| Working pressure      | Max. 15 bar, coarse vacuum                                                     |
| Application           | Air, vacuum                                                                    |
| Recommended hoses     | PU or PA (nylon)                                                               |
| Media                 | Compressed air and all gases or liquids that are compatible with the materials |
| Temp. range           | -20 °C to +80 °C                                                               |
| Sealing surface       | Parallel version: O-ring in housing                                            |
| Material              | Plastic, Nickel plated brass                                                   |
| Contact pressure ring | Plastic                                                                        |

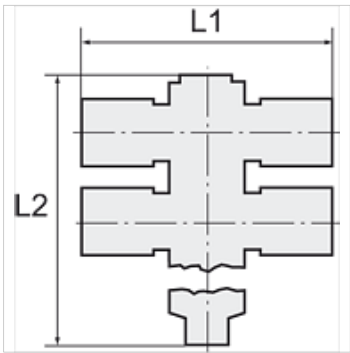

## Note

Further information on request

## Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

| Item           |        |                     |                     |         |         |       |
|----------------|--------|---------------------|---------------------|---------|---------|-------|
| Identification | Thread | for external hose Ø | hexagon socket (mm) | L1 (mm) | L2 (mm) | AF    |
| K- 07 40 06 60 | G 1/8  | 4 mm                | 4,0                 | 45,0    | 43,8    | 14 mm |
| K- 07 40 06 61 | G 1/8  | 6 mm                | 4,0                 | 42,6    | 43,8    | 14 mm |
| K- 07 40 06 62 | G 1/8  | 8 mm                | 4,0                 | 48,5    | 43,8    | 14 mm |
| K- 07 40 06 58 | G 1/4  | 6 mm                | 6,0                 | 46,7    | 58,0    | 17 mm |
| K- 07 40 06 59 | G 1/4  | 8 mm                | 6,0                 | 52,5    | 59,5    | 17 mm |
| K- 07 40 06 56 | G 1/4  | 10 mm               | 6,0                 | 59,6    | 58,0    | 17 mm |
| K- 07 40 06 57 | G 1/4  | 12 mm               | 6,0                 | 60,7    | 59,1    | 17 mm |
| K- 07 40 06 65 | G 3/8  | 8 mm                | 8,0                 | 56,7    | 60,7    | 20 mm |
| K- 07 40 06 63 | G 3/8  | 10 mm               | 8,0                 | 63,5    | 60,7    | 20 mm |
| K- 07 40 06 64 | G 3/8  | 12 mm               | 8,0                 | 64,9    | 60,7    | 20 mm |