


# K-STECKVERBINDU VA

Straight push-in connector

**HANSA****FLEX**

## Properties

|                          |   |
|--------------------------|---|
| Working pressure pulsate | Max. 10 bar   |
| Pressure                 | Max. 15 bar (depending on pipe quality)                         |
| Suitable pipe materials  | PVDF, PTFE, stainless steel, PA, PU                             |
| Ambient temperature      | -20 °C to max. +150 °C (depending on pipe quality and diameter) |
| Material                 | Stainless steel 1.4404  |
| Sealant                  | FKM   |

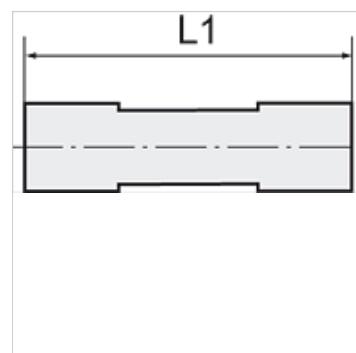

## Note

Further information on request

## Description

For use with aggressive media and in areas with corrosive outside influences, in the food processing industry and in hygienic and sanitary applications.

## Item

| Identification | for external hose Ø | L1<br>(mm) |
|----------------|---------------------|------------|
| K-07 40 24 15  | 4 mm                | 28,2       |
| K-07 40 24 16  | 6 mm                | 34,0       |
| K-07 40 24 17  | 8 mm                | 34,5       |
| K-07 40 24 18  | 10 mm               | 38,2       |
| K-07 40 24 19  | 12 mm               | 40,8       |