


# K-L-STECKVER DREH AG-K VA

Male elbows, swivel type, conical male thread



Properties	
Working pressure pulsate	Max. 10 bar
Pressure	Max. 15 bar (depending on pipe quality)
Suitable pipe materials	PVDF, PTFE, stainless steel, PA, PU
Standard	R thread acc. to ISO 7-1
Ambient temperature	-20 °C to max. +150 °C (depending on pipe quality and diameter)
Material	Stainless steel 1.4404
Sealant	FKM

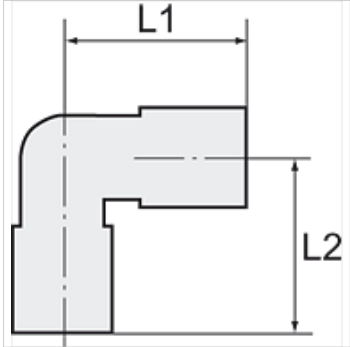

## Note

Further information on request

## Description

For use with aggressive media and in areas with corrosive outside influences, in the food processing industry and in hygienic and sanitary applications.

Item					
Identification	Thread	for external hose Ø	L1 (mm)	L2 (mm)	AF
K- 07 40 24 44	R 1/8	4 mm	17,0	17,5	10 mm
K- 07 40 24 45	R 1/8	6 mm	21,5	20,0	13 mm
K- 07 40 24 46	R 1/8	8 mm	22,0	20,0	13 mm
K- 07 40 24 42	R 1/4	6 mm	21,5	24,0	14 mm
K- 07 40 24 43	R 1/4	8 mm	22,0	24,0	14 mm
K- 07 40 24 41	R 1/4	10 mm	25,5	26,5	16 mm
K- 07 40 24 47	R 3/8	10 mm	25,5	27,0	17 mm
K- 07 40 24 48	R 3/8	12 mm	28,0	30,5	22 mm
K- 07 40 24 40	R 1/2	12 mm	28,0	33,5	22 mm