


# K-W90BK MINI

angle mini ball valves

**HANSA FLEX**

## Properties

<b>Application</b>	Compressed air, water, oil
<b>Operating pressure</b>	-0,99 bar - 20 bar
<b>Operating temperature</b>	-20 °C to +80 °C
<b>Thread description</b>	G thread acc. DIN EN ISO 228-1
<b>Housing and ball</b>	Chrome-plated brass
<b>Hand lever</b>	PA 66 glass fibre-reinforced
<b>Ball seals</b>	PTFE
<b>Stem seal</b>	NBR

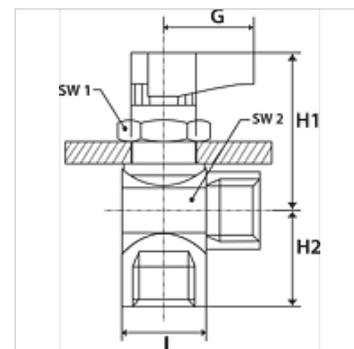

## Note

Further information on request

## Item

Identification	DN	Thread	G (mm)	H1 (mm)	H2 (mm)	L (mm)	AF1 (mm)	AF2 (mm)
K- 07 30 29 84	5	G 1/8 female	19,00	33,5	15,5	28,5	17	17
K- 07 30 29 85	5	G 1/4 female	19,00	33,5	17,5	28,5	17	17
K- 07 30 29 86	7	G 3/8 female	19,00	35,0	19,5	31,0	17	21