

# K-Y-STECK VB MINI

Y unions, mini

**HANSA FLEX**

## Properties

**Working pressure** Max. 10 bar, vacuum

**Application** Air, vacuum


**Recommended hoses** PU or PA (nylon)

**Media** Compressed air

**Temp. range** 0 °C to +60 °C

**Material** Plastic, Nickel plated brass

**Contact pressure ring** Plastic

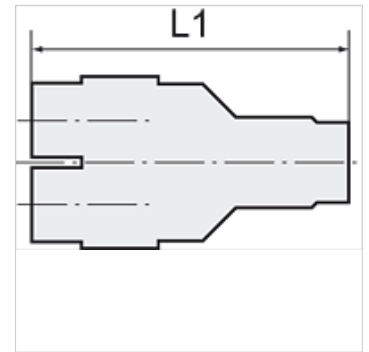

## Note

Further information on request

## Description

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

## Item

Identification	for external hose $\varnothing$	L1 (mm)
K- 07 40 50 20	3 mm	28,8
K- 07 40 50 21	4 mm	29,4
K- 07 40 50 22	6 mm	31,8