
# K-STECKVERSCHR AGR-K SK VA


Male connectors, conical male thread with outer hex

HANSA-FLEX

## Properties

| | |
|---|---|
| **Working pressure pulsate** | Max. 10 bar |
| **Pressure** | Max. 15 bar (depending on pipe quality) |
| **Suitable pipe materials** | PVDF, PTFE, stainless steel, PA, PU |
| **Standard** | R thread acc. to ISO 7-1 |
| **Ambient temperature** | -20 °C to max. +150 °C (depending on pipe quality and diameter) |
| **Material** | Stainless steel 1.4404 |
| **Sealant** | FKM |

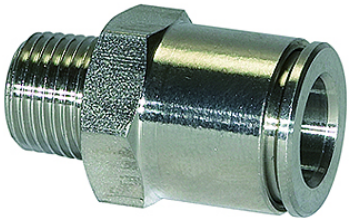

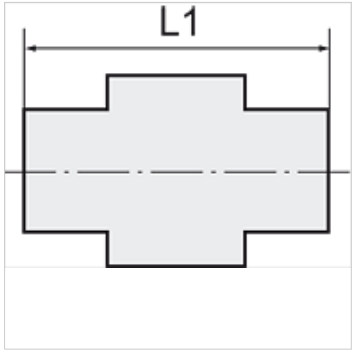


## Note

Further information on request

## Description

For use with aggressive media and in areas with corrosive outside influences, in the food processing industry and in hygienic and sanitary applications.

## Item

| Identification | Thread | for external hose Ø | L1 (mm) | AF |
|---|---|---|---|---|
| **K- 07 40 24 10** | R 1/8 | 4 mm | 16,6 | 10 mm |
| **K- 07 40 24 11** | R 1/8 | 6 mm | 21,2 | 12 mm |
| **K- 07 40 24 12** | R 1/8 | 8 mm | 25,2 | 14 mm |
| **K- 07 40 24 07** | R 1/4 | 4 mm | 20,6 | 14 mm |
| **K- 07 40 24 08** | R 1/4 | 6 mm | 20,7 | 14 mm |
| **K- 07 40 24 09** | R 1/4 | 8 mm | 23,7 | 14 mm |
| **K- 07 40 24 06** | R 1/4 | 10 mm | 30,3 | 16 mm |
| **K- 07 40 24 13** | R 3/8 | 10 mm | 23,5 | 17 mm |
| **K- 07 40 24 14** | R 3/8 | 12 mm | 27,4 | 19 mm |
| **K- 07 40 24 05** | R 1/2 | 12 mm | 27,4 | 22 mm |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*