


# K-STECKVERBINDU 1

Straight push-in connector

**HANSA****FLEX**

## Properties

|                       |                     |
|-----------------------|---------------------|
| Working pressure      | Max. 16 bar         |
| Operating temperature | -20 °C to +80 °C    |
| Material              | Nickel-plated brass |
| Contact pressure ring | Hostaform           |
| Clamping ring         | Stainless steel     |

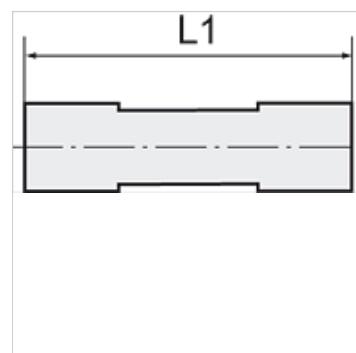

## Note

Further information on request

## Description

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Item

| Identification | Thread     | for external hose Ø | L1<br>(mm) |
|----------------|------------|---------------------|------------|
| K- 07 40 25 18 | M 8 x 0,75 | 3 mm                | 18,4       |
| K- 07 40 25 19 | M 11 x 1   | 4 mm                | 30,6       |
| K- 07 40 25 20 | M 14 x 1   | 5 mm                | 33,5       |
| K- 07 40 25 21 | M 13 x 1   | 6 mm                | 33,0       |
| K- 07 40 25 22 | M 15 x 1   | 8 mm                | 35,7       |
| K- 07 40 25 23 | M 17 x 1   | 10 mm               | 39,2       |
| K- 07 40 25 24 | M 20 x 1   | 12 mm               | 39,7       |
| K- 07 40 25 25 | M 24 x 1   | 14 mm               | 45,9       |