



# K-T-STECK VERS DRE AG OR 1

Male branch tees, swivel type, parallel male thread with O-ring

**HANSA FLEX**

## Properties

|                       |                     |
|-----------------------|---------------------|
| Working pressure      | Max. 16 bar         |
| Operating temperature | -20 °C to +80 °C    |
| Material              | Nickel-plated brass |
| Contact pressure ring | Hostaform           |
| O-ring                | NBR                 |
| Clamping ring         | Stainless steel     |

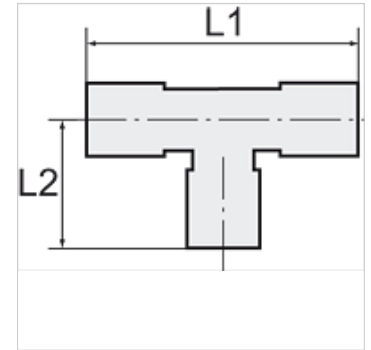

## Note

Further information on request

## Description

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Item

| Identification | Thread | for external hose Ø | L1<br>(mm) | L2<br>(mm) | AF    |
|----------------|--------|---------------------|------------|------------|-------|
| K- 07 40 47 21 | M 5    | 4 mm                | 37,2       | 15,3       | 9 mm  |
| K- 07 40 47 22 | M 5    | 6 mm                | 43,8       | 15,3       | 9 mm  |
| K- 07 40 25 91 | G 1/8  | 4 mm                | 37,2       | 19,1       | 12 mm |
| K- 07 40 25 92 | G 1/8  | 5 mm                | 44,6       | 19,1       | 12 mm |
| K- 07 40 25 93 | G 1/8  | 6 mm                | 43,8       | 19,1       | 12 mm |
| K- 07 40 25 94 | G 1/8  | 8 mm                | 50,8       | 19,1       | 12 mm |
| K- 07 40 47 23 | G 1/4  | 4 mm                | 37,2       | 21,1       | 14 mm |
| K- 07 40 25 89 | G 1/4  | 6 mm                | 43,8       | 21,1       | 14 mm |
| K- 07 40 25 90 | G 1/4  | 8 mm                | 50,8       | 21,1       | 14 mm |
| K- 07 40 25 88 | G 1/4  | 10 mm               | 54,4       | 21,8       | 14 mm |
| K- 07 40 25 97 | G 3/8  | 8 mm                | 47,2       | 27,1       | 17 mm |
| K- 07 40 25 95 | G 3/8  | 10 mm               | 54,4       | 27,1       | 17 mm |
| K- 07 40 25 96 | G 3/8  | 12 mm               | 59,0       | 27,1       | 17 mm |
| K- 07 40 25 86 | G 1/2  | 12 mm               | 59,0       | 30,7       | 22 mm |
| K- 07 40 25 87 | G 1/2  | 14 mm               | 66,0       | 32,3       | 22 mm |