
# K-STECKVERSCHR IG SK 2


Female connectors, parallel female thread with outer hex

HANSA-FLEX

## Properties

| | |
|---|---|
| **Working pressure** | Max. 15 bar, coarse vacuum |
| **Application** | Air, vacuum |
| **Recommended hoses** | PU or PA (nylon) |
| **Media** | Compressed air and all gases or liquids that are compatible with the materials |
| **Temp. range** | -20 °C to +80 °C |
| **Material** | Plastic, Nickel plated brass |
| **Contact pressure ring** | Plastic |



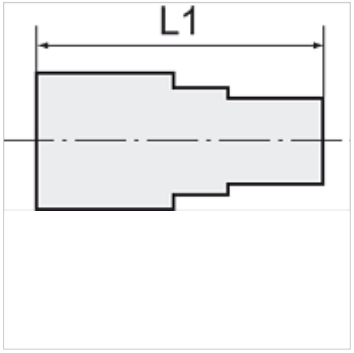


## Note

Further information on request

## Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Item

| Identification | Thread | for external hose Ø | L1 (mm) | AF |
|---|---|---|---|---|
| **K- 07 40 01 20** | M 5 | 4 mm | 21,3 | 10 mm |
| **K- 07 40 01 21** | M 5 | 6 mm | 22,2 | 12 mm |
| **K- 07 40 01 31** | G 1/8 | 4 mm | 23,8 | 14 mm |
| **K- 07 40 01 32** | G 1/8 | 6 mm | 25,2 | 14 mm |
| **K- 07 40 01 33** | G 1/8 | 8 mm | 27,1 | 14 mm |
| **K- 07 40 41 28** | G 1/8 | 10 mm | 28,5 | 14 mm |
| **K- 07 40 01 28** | G 1/4 | 4 mm | 26,8 | 17 mm |
| **K- 07 40 01 29** | G 1/4 | 6 mm | 28,2 | 17 mm |
| **K- 07 40 01 30** | G 1/4 | 8 mm | 30,1 | 17 mm |
| **K- 07 40 01 26** | G 1/4 | 10 mm | 32,2 | 17 mm |
| **K- 07 40 01 27** | G 1/4 | 12 mm | 34,6 | 21 mm |
| **K- 07 40 01 36** | G 3/8 | 6 mm | 29,2 | 21 mm |
| **K- 07 40 01 37** | G 3/8 | 8 mm | 31,1 | 21 mm |
| **K- 07 40 01 34** | G 3/8 | 10 mm | 33,4 | 21 mm |
| **K- 07 40 01 35** | G 3/8 | 12 mm | 35,6 | 21 mm |
| **K- 07 40 01 24** | G 1/2 | 6 mm | 31,2 | 24 mm |
| **K- 07 40 01 25** | G 1/2 | 8 mm | 33,1 | 24 mm |
| **K- 07 40 01 22** | G 1/2 | 10 mm | 35,2 | 24 mm |
| **K- 07 40 01 23** | G 1/2 | 12 mm | 37,6 | 24 mm |
| **K- 07 40 41 27** | G 1/2 | 16 mm | 39,7 | 24 mm |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*