


# K-L-STECKVER DREH AG-K BESCH

Male elbows, swivel type, conical male thread, coated

**HANSA FLEX**

## Properties

<b>Working pressure</b>	Max. 15 bar, coarse vacuum
<b>Application</b>	Air, vacuum
<b>Recommended hoses</b>	PU or PA (nylon)
<b>Media</b>	Compressed air and all gases or liquids that are compatible with the materials
<b>Temp. range</b>	-20 °C to +80 °C
<b>Sealing surface</b>	Conical version: thread coating
<b>Material</b>	Plastic, Nickel plated brass
<b>Contact pressure ring</b>	Plastic

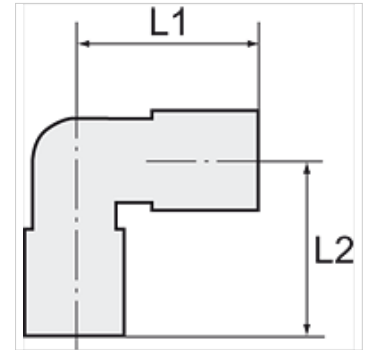

## Note

Further information on request

## Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Item

Identification	Thread	for external hose Ø	L1 (mm)	L2 (mm)	AF
K- 07 40 01 68	R 1/8	4 mm	18,8	18,5	10 mm
K- 07 40 01 69	R 1/8	6 mm	20,0	19,5	10 mm
K- 07 40 01 70	R 1/8	8 mm	22,5	22,9	10 mm
K- 07 40 01 65	R 1/4	4 mm	18,8	20,0	14 mm
K- 07 40 01 66	R 1/4	6 mm	20,0	21,0	14 mm
K- 07 40 01 67	R 1/4	8 mm	22,5	21,5	14 mm
K- 07 40 01 63	R 1/4	10 mm	26,9	26,3	17 mm
K- 07 40 01 64	R 1/4	12 mm	28,5	27,8	17 mm
K- 07 40 01 74	R 3/8	6 mm	20,0	22,5	17 mm
K- 07 40 01 75	R 3/8	8 mm	22,5	23,0	17 mm
K- 07 40 01 71	R 3/8	10 mm	26,9	24,8	17 mm
K- 07 40 01 72	R 3/8	12 mm	28,5	26,3	17 mm
K- 07 40 01 73	R 3/8	16 mm	33,5	33,7	20 mm
K- 07 40 01 61	R 1/2	6 mm	20,0	25,5	21 mm
K- 07 40 01 62	R 1/2	8 mm	22,5	26,0	21 mm
K- 07 40 01 58	R 1/2	10 mm	26,9	27,8	21 mm
K- 07 40 01 59	R 1/2	12 mm	28,5	29,3	21 mm
K- 07 40 01 60	R 1/2	16 mm	33,5	36,7	21 mm