



# K-Y-STECK VERSCH DREH AG OR

Male branch Y-fittings, swivel type, parallel male thread with O-ring

**HANSA FLEX**

## Properties

<b>Working pressure</b>	Max. 15 bar, coarse vacuum
<b>Application</b>	Air, vacuum
<b>Recommended hoses</b>	PU or PA (nylon)
<b>Media</b>	Compressed air and all gases or liquids that are compatible with the materials
<b>Temp. range</b>	-20 °C to +80 °C
<b>Sealing surface</b>	Parallel version: O-ring in housing
<b>Material</b>	Plastic, Nickel plated brass
<b>Contact pressure ring</b>	Plastic

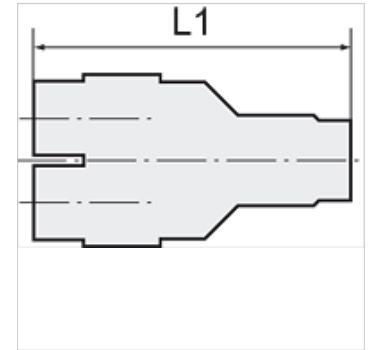

## Note

Further information on request

## Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Item

Identification	Thread	for external hose Ø	L1 (mm)	AF
K- 07 40 02 97	M 5	4 mm	39,5	10 mm
K- 07 40 02 98	M 5	6 mm	40,0	12 mm
K- 07 40 03 11	G 1/8	4 mm	42,5	12 mm
K- 07 40 03 12	G 1/8	6 mm	43,5	14 mm
K- 07 40 03 13	G 1/8	8 mm	46,3	14 mm
K- 07 40 03 09	G 1/8	10 mm	55,5	17 mm
K- 07 40 03 10	G 1/8	12 mm	58,4	21 mm
K- 07 40 03 06	G 1/4	4 mm	44,0	12 mm
K- 07 40 03 07	G 1/4	6 mm	45,0	14 mm
K- 07 40 03 08	G 1/4	8 mm	47,8	17 mm
K- 07 40 03 04	G 1/4	10 mm	56,5	17 mm
K- 07 40 03 05	G 1/4	12 mm	59,4	21 mm
K- 07 40 03 17	G 3/8	6 mm	46,5	14 mm
K- 07 40 03 18	G 3/8	8 mm	49,3	17 mm
K- 07 40 03 14	G 3/8	10 mm	58,0	20 mm
K- 07 40 03 15	G 3/8	12 mm	60,4	21 mm
K- 07 40 03 16	G 3/8	16 mm	69,0	24 mm
K- 07 40 03 02	G 1/2	6 mm	49,0	14 mm
K- 07 40 03 03	G 1/2	8 mm	52,8	17 mm
K- 07 40 02 99	G 1/2	10 mm	61,5	19 mm
K- 07 40 03 00	G 1/2	12 mm	63,9	24 mm
K- 07 40 03 01	G 1/2	16 mm	72,5	24 mm