# K-Y-STECK VERSCH DREH AG OR


Male branch Y-fittings, swivel type, parallel male thread with O-ring

HANSA-FLEX

## Properties

| | |
|---|---|
| **Working pressure** | Max. 15 bar, coarse vacuum |
| **Application** | Air, vacuum |
| **Recommended hoses** | PU or PA (nylon) |
| **Media** | Compressed air and all gases or liquids that are compatible with the materials |
| **Temp. range** | -20 °C to +80 °C |
| **Sealing surface** | Parallel version: O-ring in housing |
| **Material** | Plastic, Nickel plated brass |
| **Contact pressure ring** | Plastic |



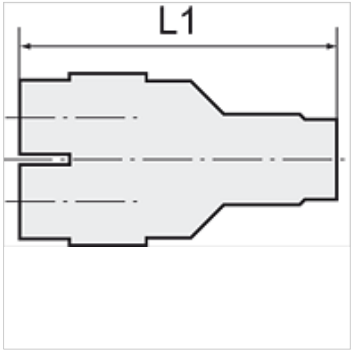


## Note

Further information on request

## Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Item

| Identification | Thread | for external hose Ø | L1 (mm) | AF |
|---|---|---|---|---|
| **K- 07 40 02 97** | M 5 | 4 mm | 39,5 | 10 mm |
| **K- 07 40 02 98** | M 5 | 6 mm | 40,0 | 12 mm |
| **K- 07 40 03 11** | G 1/8 | 4 mm | 42,5 | 12 mm |
| **K- 07 40 03 12** | G 1/8 | 6 mm | 43,5 | 14 mm |
| **K- 07 40 03 13** | G 1/8 | 8 mm | 46,3 | 14 mm |
| **K- 07 40 03 09** | G 1/8 | 10 mm | 55,5 | 17 mm |
| **K- 07 40 03 10** | G 1/8 | 12 mm | 58,4 | 21 mm |
| **K- 07 40 03 06** | G 1/4 | 4 mm | 44,0 | 12 mm |
| **K- 07 40 03 07** | G 1/4 | 6 mm | 45,0 | 14 mm |
| **K- 07 40 03 08** | G 1/4 | 8 mm | 47,8 | 17 mm |
| **K- 07 40 03 04** | G 1/4 | 10 mm | 56,5 | 17 mm |
| **K- 07 40 03 05** | G 1/4 | 12 mm | 59,4 | 21 mm |
| **K- 07 40 03 17** | G 3/8 | 6 mm | 46,5 | 14 mm |
| **K- 07 40 03 18** | G 3/8 | 8 mm | 49,3 | 17 mm |
| **K- 07 40 03 14** | G 3/8 | 10 mm | 58,0 | 20 mm |
| **K- 07 40 03 15** | G 3/8 | 12 mm | 60,4 | 21 mm |
| **K- 07 40 03 16** | G 3/8 | 16 mm | 69,0 | 24 mm |
| **K- 07 40 03 02** | G 1/2 | 6 mm | 49,0 | 14 mm |
| **K- 07 40 03 03** | G 1/2 | 8 mm | 52,8 | 17 mm |
| **K- 07 40 02 99** | G 1/2 | 10 mm | 61,5 | 19 mm |
| **K- 07 40 03 00** | G 1/2 | 12 mm | 63,9 | 24 mm |
| **K- 07 40 03 01** | G 1/2 | 16 mm | 72,5 | 24 mm |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*