


# K-STECKVERBINDU 10BAR

Straight push-in connector (pressure max. 10 bar)

**HANSA FLEX**

## Properties

<b>Working pressure</b>	Max. 10 bar
<b>Application</b>	Air, vacuum
<b>Recommended hoses</b>	PU or PA (nylon)
<b>Media</b>	Compressed air and all gases or liquids that are compatible with the materials
<b>Temp. range</b>	-20 °C to +80 °C
<b>Material</b>	Plastic, Nickel plated brass
<b>Contact pressure ring</b>	Plastic

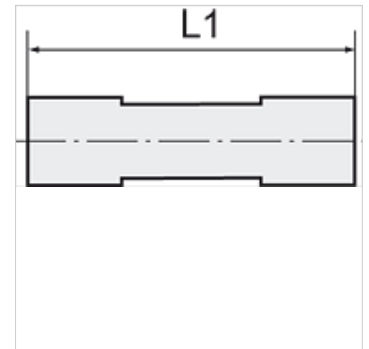

## Note

Further information on request

## Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Item

Identification	for external hose Ø	L1 (mm)
K- 07 40 03 39	4 mm	33,0
K- 07 40 03 40	6 mm	34,6
K- 07 40 03 41	8 mm	38,5
K- 07 40 03 42	10 mm	47,0
K- 07 40 03 43	12 mm	48,6
K- 07 40 41 32	14 mm	48,7
K- 07 40 03 44	16 mm	49,8