


# K-STECKVERBINDU RED 10BAR

Reducers (pressure max. 10 bar)

**HANSA FLEX**

## Properties

|                              |  |
|------------------------------|--|
| <b>Working pressure</b>      | Max. 10 bar  |
| <b>Application</b>           | Air, vacuum  |
| <b>Recommended hoses</b>     | PU or PA (nylon)   |
| <b>Media</b>                 | Compressed air and all gases or liquids that are compatible with the materials |
| <b>Temp. range</b>           | -20 °C to +80 °C   |
| <b>Material</b>              | Plastic, Nickel plated brass   |
| <b>Contact pressure ring</b> | Plastic  |

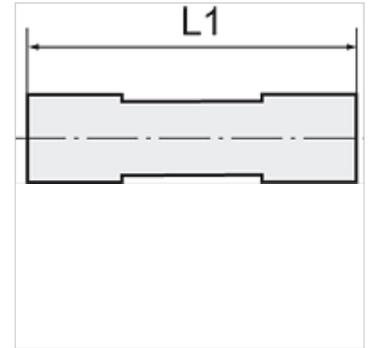

## Note

Further information on request

## Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Item

| Identification | for external hose Ø | L1<br>(mm) |
|----------------|---------------------|------------|
| K- 07 40 03 45 | 6 mm / 4 mm         | 31,0       |
| K- 07 40 41 34 | 8 mm / 4 mm         | 36,5       |
| K- 07 40 03 46 | 8 mm / 6 mm         | 34,5       |
| K- 07 40 41 35 | 10 mm / 6 mm        | 40,2       |
| K- 07 40 03 47 | 10 mm / 8 mm        | 39,4       |
| K- 07 40 41 36 | 12 mm / 8 mm        | 45,0       |
| K- 07 40 03 48 | 12 mm / 10 mm       | 44,2       |
| K- 07 40 03 49 | 16 mm / 12 mm       | 49,6       |