


K-Y-STECK VB RED 10 BAR

Y unions, unequal (pressure max. 10 bar)

HANSA FLEX

Properties

| | |
|------------------------------|--|
| Working pressure | Max. 10 bar |
| Application | Air, vacuum |
| Recommended hoses | PU or PA (nylon) |
| Media | Compressed air and all gases or liquids that are compatible with the materials |
| Temp. range | -20 °C to +80 °C |
| Material | Plastic, Nickel plated brass |
| Contact pressure ring | Plastic |

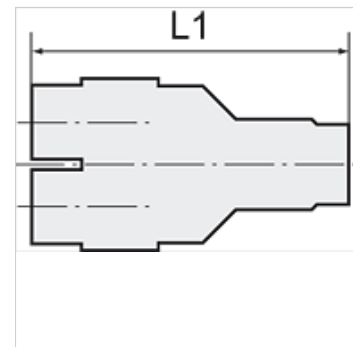

Note

Further information on request

Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Item

| Identification | for external hose Ø | L1 (mm) |
|----------------|-----------------------|------------|
| K- 07 40 03 81 | 1 x 6 mm / 2 x 4 mm | 36,5 |
| K- 07 40 42 07 | 1 x 8 mm / 2 x 4 mm | 42,0 |
| K- 07 40 03 82 | 1 x 8 mm / 2 x 6 mm | 39,8 |
| K- 07 40 42 08 | 1 x 10 mm / 2 x 6 mm | 43,8 |
| K- 07 40 03 83 | 1 x 10 mm / 2 x 8 mm | 48,9 |
| K- 07 40 42 09 | 1 x 12 mm / 2 x 8 mm | 52,0 |
| K- 07 40 03 84 | 1 x 12 mm / 2 x 10 mm | 52,6 |