


# K-L-STECKVER SK DREH AG-K

Banjo elbows with outer hex, swivel type, conical male thread, coated

**HANSA FLEX**

## Properties

<b>Working pressure</b>	Max. 15 bar, coarse vacuum
<b>Application</b>	Air, vacuum
<b>Recommended hoses</b>	PU or PA (nylon)
<b>Media</b>	Compressed air and all gases or liquids that are compatible with the materials
<b>Temp. range</b>	-20 °C to +80 °C
<b>Sealing surface</b>	Conical version: thread coating
<b>Material</b>	Plastic, Nickel plated brass
<b>Contact pressure ring</b>	Plastic

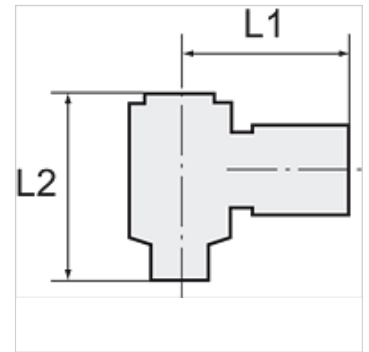

## Note

Further information on request

## Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Item

Identification	Thread	for external hose Ø	L1 (mm)	L2 (mm)	AF
K- 07 40 09 52	R 1/8	4 mm	22,3	23,5	10 mm
K- 07 40 09 53	R 1/8	6 mm	22,9	23,5	10 mm
K- 07 40 09 54	R 1/8	8 mm	25,3	23,5	10 mm
K- 07 40 09 50	R 1/4	6 mm	24,9	26,3	14 mm
K- 07 40 09 51	R 1/4	8 mm	28,4	26,3	14 mm
K- 07 40 09 49	R 1/4	10 mm	32,0	26,3	14 mm
K- 07 40 43 51	R 1/4	12 mm	33,2	26,3	14 mm
K- 07 40 09 57	R 3/8	6 mm	26,6	31,9	19 mm
K- 07 40 09 58	R 3/8	8 mm	29,3	31,9	19 mm
K- 07 40 09 55	R 3/8	10 mm	32,5	31,9	19 mm
K- 07 40 09 56	R 3/8	12 mm	35,3	31,9	19 mm
K- 07 40 09 48	R 1/2	8 mm	32,3	38,6	24 mm
K- 07 40 09 46	R 1/2	10 mm	35,5	38,6	24 mm
K- 07 40 09 47	R 1/2	12 mm	36,3	38,6	24 mm