


Properties

| | |
|-----------------------|--|
| Working pressure | Max. 15 bar, coarse vacuum |
| Application | Air, vacuum |
| Recommended hoses | PU or PA (nylon) |
| Media | Compressed air and all gases or liquids that are compatible with the materials |
| Temp. range | -20 °C to +80 °C |
| Material | Plastic, Nickel plated brass |
| Contact pressure ring | Plastic |

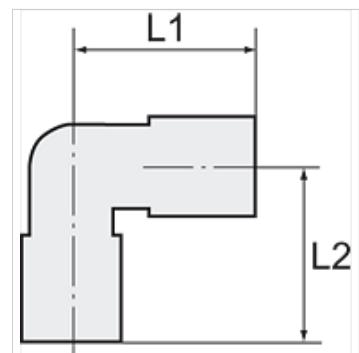

Note

Further information on request

Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Item

| Identification | for external hose Ø | Thread control panel | L1 (mm) | L2 (mm) | AF |
|----------------|---------------------|----------------------|------------|------------|-------|
| K-07 40 04 47 | 4 mm | M 12 x 1 | 17,5 | 31,3 | 14 mm |
| K-07 40 04 48 | 6 mm | M 14 x 1 | 18,7 | 37,9 | 17 mm |
| K-07 40 04 49 | 8 mm | M 16 x 1 | 22,5 | 43,6 | 19 mm |
| K-07 40 04 50 | 10 mm | M 20 x 1 | 27,2 | 51,2 | 24 mm |
| K-07 40 04 51 | 12 mm | M 22 x 1 | 29,3 | 56,1 | 27 mm |
| K-07 40 04 52 | 16 mm | M 27 x 1 | 32,5 | 62,6 | 30 mm |