


K-T-MEHRFACHVERT 3 STECK RD

Tee distributors with plug connection, 3 unequal outlets

HANSA FLEX

Properties

| | |
|------------------------------|--|
| Working pressure | Max. 15 bar, coarse vacuum |
| Application | Air, vacuum |
| Recommended hoses | PU or PA (nylon) |
| Media | Compressed air and all gases or liquids that are compatible with the materials |
| Temp. range | -20 °C to +80 °C |
| Material | Plastic, Nickel plated brass |
| Contact pressure ring | Plastic |

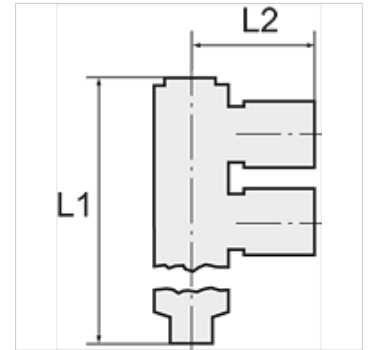

Note

Further information on request

Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Item

| Identification | for external hose Ø | L1 (mm) | L2 (mm) |
|----------------|----------------------|------------|------------|
| K- 07 40 04 22 | 2 x 6 mm / 3 x 4 mm | 57,0 | 19,0 |
| K- 07 40 04 23 | 2 x 8 mm / 3 x 4 mm | 62,0 | 20,0 |
| K- 07 40 04 24 | 2 x 8 mm / 3 x 6 mm | 62,0 | 20,0 |
| K- 07 40 04 25 | 2 x 10 mm / 3 x 6 mm | 81,8 | 23,5 |
| K- 07 40 04 26 | 2 x 10 mm / 3 x 8 mm | 81,8 | 23,5 |