# K-EINPRESSPATRONE

Press-in sleeves - can only be pressed into plastic

## Properties

| | |
|---|---|
| **Working pressure** | Max. 15 bar, coarse vacuum |
| **Application** | Air, vacuum |
| **Recommended hoses** | PU or PA (nylon) |
| **Media** | Compressed air and all gases or liquids that are compatible with the materials |
| **Temp. range** | -20 °C to +80 °C |
| **Sealing surface** | Parallel version: O-ring in housing, Conical version: thread coating |
| **Material** | Plastic, Nickel plated brass |
| **Contact pressure ring** | Plastic |



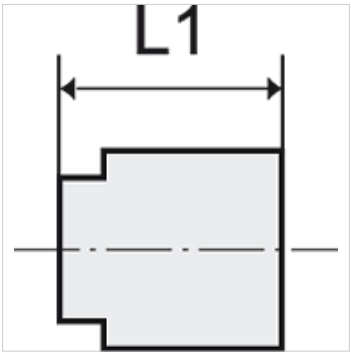


## Note

Only in plastic press-fitted
Further information on request

## Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Item

| Identification | for external hose Ø | L1 (mm) |
|---|---|---|
| **K- 07 40 09 95** | 4 mm | 11,3 |
| **K- 07 40 09 96** | 6 mm | 11,9 |
| **K- 07 40 09 97** | 8 mm | 13,7 |
| **K- 07 40 09 98** | 10 mm | 15,2 |
| **K- 07 40 09 99** | 12 mm | 17,6 |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*