


K-DRG PNEU FERNGEST MULTIFIX

Pressure regulators with pneumatic remote control

HANSA FLEX

Properties

Input pressure	Max. 16 bar
Output pressure	corresponds to the set pressure of the pilot pressure regulator
Media temperature	max. 60 °C
Ambient temperature	Max. 60 °C
Sealant	NBR
Housing	Die-cast zinc, Aluminium for G 1 variant
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar
Pilot air connection	G 1/8

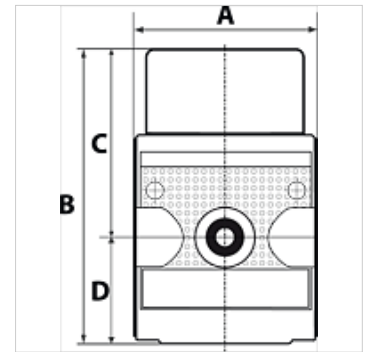

Note

Further information on request

Description

Diaphragm pressure regulator, self-relieving, with pneumatic remote control. The pressure is set with a pilot pressure regulator (1:1 ratio). Either a standard or a precision pressure regulator can be used to regulate the pilot pressure.

Item						
Identification	Thread	Flow rate (L/min)	A (mm)	B	C (mm)	D (mm)
K- 07 25 19 56	G 1/4	1800	48,0	75.0 mm	48,0	27,0
K- 07 25 19 57	G 1/2	4800	69,0	94.0 mm	59,0	35,0
K- 07 25 19 58	G 1	12500	100,0	112.0 mm	60,0	52,0

Spare parts

K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-VERSCHLEI-SATZ MULTIFIX	Set of wearing parts »multifix«