


K-DRG PNEU FERNGEST MULTIFIX

Pressure regulators with pneumatic remote control

HANSA FLEX

Properties

| | |
|------------------------------|---|
| Input pressure | Max. 16 bar |
| Output pressure | corresponds to the set pressure of the pilot pressure regulator |
| Media temperature | max. 60 °C |
| Ambient temperature | Max. 60 °C |
| Sealant | NBR |
| Housing | Die-cast zinc, Aluminium for G 1 variant |
| Flow rate measurement | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |
| Pilot air connection | G 1/8 |

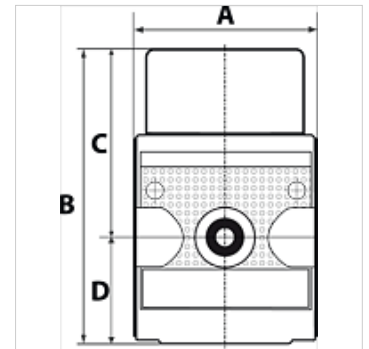

Note

Further information on request

Description

Diaphragm pressure regulator, self-relieving, with pneumatic remote control. The pressure is set with a pilot pressure regulator (1:1 ratio). Either a standard or a precision pressure regulator can be used to regulate the pilot pressure.

Item

| Identification | Thread | Flow rate (L/min) | A (mm) | B | C (mm) | D (mm) |
|----------------|--------|-------------------|--------|----------|--------|--------|
| K- 07 25 19 56 | G 1/4 | 1800 | 48,0 | 75.0 mm | 48,0 | 27,0 |
| K- 07 25 19 57 | G 1/2 | 4800 | 69,0 | 94.0 mm | 59,0 | 35,0 |
| K- 07 25 19 58 | G 1 | 12500 | 100,0 | 112.0 mm | 60,0 | 52,0 |

Spare parts

| | |
|---------------------------|---------------------------------|
| K-HALTERBAUSATZ MULTIFIX | Holder |
| K-KOPPELPAKET MEHR | Coupling packet |
| K-VERSCHLEI-SATZ MULTIFIX | Set of wearing parts »multifix« |