


# K-DRG PNEU FERNGEST MULTIFIX

Pressure regulators with pneumatic remote control

**HANSA FLEX**

## Properties

<b>Input pressure</b>	Max. 16 bar
<b>Output pressure</b>	corresponds to the set pressure of the pilot pressure regulator
<b>Media temperature</b>	max. 60 °C
<b>Ambient temperature</b>	Max. 60 °C
<b>Sealant</b>	NBR
<b>Housing</b>	Die-cast zinc, Aluminium for G 1 variant
<b>Flow rate measurement</b>	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p$ = 1 bar
<b>Pilot air connection</b>	G 1/8

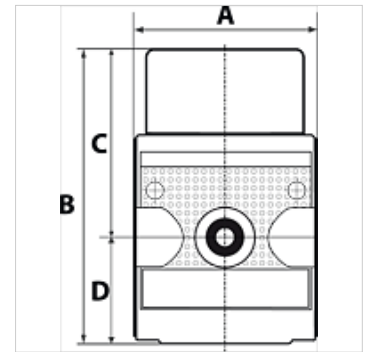

## Note

Further information on request

## Description

Diaphragm pressure regulator, self-relieving, with pneumatic remote control. The pressure is set with a pilot pressure regulator (1:1 ratio). Either a standard or a precision pressure regulator can be used to regulate the pilot pressure.

Item						
Identification	Thread	Flow rate (L/min)	A (mm)	B	C (mm)	D (mm)
K- 07 25 19 56	G 1/4	1800	48,0	75.0 mm	48,0	27,0
K- 07 25 19 57	G 1/2	4800	69,0	94.0 mm	59,0	35,0
K- 07 25 19 58	G 1	12500	100,0	112.0 mm	60,0	52,0

## Spare parts

K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-VERSCHLEI-SATZ MULTIFIX	Set of wearing parts »multifix«