

K-Y-STECK VB STECKNIP MINI

Y unions with push-in plug, mini

HANSA FLEX

Properties

Working pressure Max. 10 bar, vacuum

Application Air, vacuum


Recommended hoses PU or PA (nylon)

Media Compressed air

Temp. range 0 °C to +60 °C

Material Plastic, Nickel plated brass

Contact pressure ring Plastic

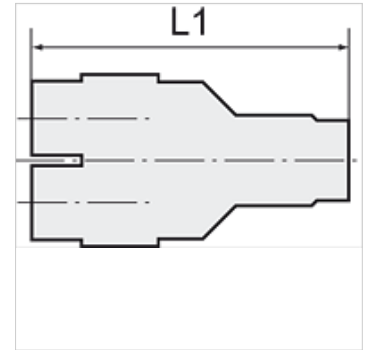

Note

Further information on request

Description

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Item

Identification	for external hose Ø	L1 (mm)	Push-in plugs (mm)
K- 07 40 50 25	3 mm	38,0	3
K- 07 40 50 26	4 mm	43,0	4
K- 07 40 50 27	6 mm	46,0	6