

K-Y-STECK VB RED MINI

Y unions, unequal, mini

HANSA FLEX

Properties

Working pressure Max. 10 bar, vacuum

Application Air, vacuum

Recommended hoses PU or PA (nylon)


Media Compressed air

Temp. range 0 °C to +60 °C

Material Plastic, Nickel plated brass

Contact pressure ring Plastic

Pneumatic Type

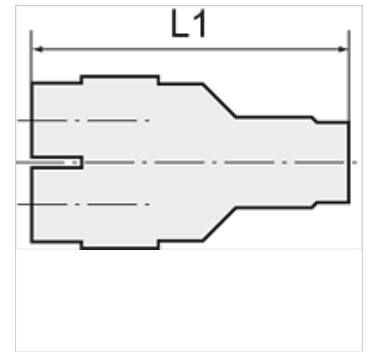

Note

Further information on request

Description

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Item

Identification	for external hose Ø	L1 (mm)
K- 07 40 50 23	4 mm / 3 mm	29,1
K- 07 40 50 24	6 mm / 4 mm	31,6