



K-SCHLAUCH VB POLYPROP

Hose connectors - polypropylene

HANSA FLEX

Properties

| | |
|------------------------------|---|
| Operating pressure | Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 2.5 bar (at 90 °C) |
| Material | Polypropylene (PP) |
| Operating temperature | Max. 90 °C |

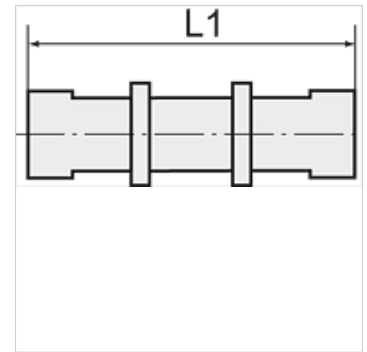

Note

Further information on request

Description

Chemically resistant to almost all inorganic acids and bases, even in high concentrations and at temperatures greater than 90 °C.

Item

| Identification | for hose | L1 (mm) | AF |
|----------------|--------------|------------|-------|
| K- 07 40 41 47 | 4 mm / 6 mm | 39,0 | 14 mm |
| K- 07 40 41 51 | 6 mm / 8 mm | 49,0 | 19 mm |
| K- 07 40 41 53 | 8 mm / 10 mm | 55,0 | 22 mm |
| K- 07 40 41 55 | 9 mm / 12 mm | 64,0 | 24 mm |