


| Properties | |
|-----------------------|------------------------------|
| Operating pressure | 60 bar |
| Operating temperature | Max. 150 °C |
| Female thread | Parallel to DIN EN ISO 228-1 |
| Material | Nickel-plated brass |
| Male thread | conical acc. DIN 2999 |

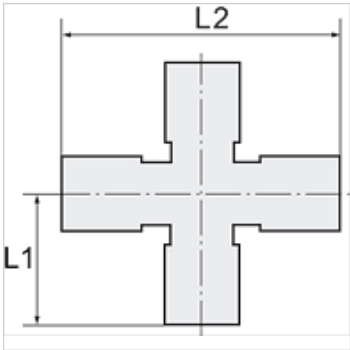

Note
Further information on request

| Item | | | | |
|----------------|---------|------------|------------|-------|
| Identification | Thread | L1 (mm) | L2 (mm) | AF |
| K- 07 40 49 11 | G/R 1/8 | 18,5 | 42,0 | 10 mm |
| K- 07 40 49 12 | G/R 1/4 | 23,5 | 51,0 | 13 mm |
| K- 07 40 49 13 | G/R 3/8 | 26,0 | 56,0 | 17 mm |
| K- 07 40 49 14 | G/R 1/2 | 31,0 | 67,0 | 21 mm |