


K-3 BKR MINI T

3-way mini ball valves, T-Bore



| Properties | |
|-----------------------|--------------------------------|
| Application | Compressed air, water, oil |
| Operating pressure | -0,99 bar - 20 bar |
| Operating temperature | -20 °C to +80 °C |
| Thread description | G thread acc. DIN EN ISO 228-1 |
| Housing and ball | Chrome-plated brass |
| Hand lever | PA 66 glass fibre-reinforced |
| Ball seals | PTFE |
| Stem seal | NBR |

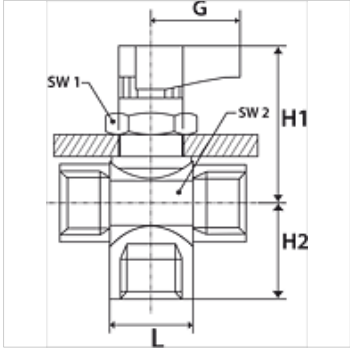

Note
Further information on request

| Item | | | | | | | | |
|----------------|----|--------------|-----------|------------|------------|-----------|-------------|-------------|
| Identification | DN | Thread | G (mm) | H1 (mm) | H2 (mm) | L (mm) | AF1 (mm) | AF2 (mm) |
| K- 07 30 29 90 | 5 | G 1/8 female | 19,00 | 33,5 | 15,5 | 35,0 | 17 | 17 |
| K- 07 30 29 91 | 5 | G 1/4 female | 19,00 | 33,5 | 17,5 | 37,0 | 17 | 17 |
| K- 07 30 29 92 | 7 | G 3/8 female | 19,00 | 35,0 | 19,5 | 42,0 | 17 | 21 |