
K-XG LOESBAR IG IG FLACHDICHT

Detachable double nipples, female, flat seat

Properties

Working pressure	Max. 10 bar
Male thread	Parallel to DIN EN ISO 228-1
Female thread	Parallel to DIN EN ISO 228-1
Material	Stainless steel 1.4408



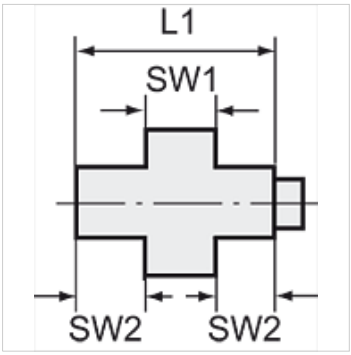

Note

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Further information on request

Item

Identification	Thread	L1 (mm)	AF1 (mm)	AF2 (mm)
K- 07 40 45 85	G 1/8	32,3	29	18
K- 07 40 45 94	G 1/4	32,4	29	18
K- 07 40 45 95	G 3/8	34,7	34	22
K- 07 40 46 00	G 1/2	40,0	39	26
K- 07 40 46 01	G 3/4	42,0	47	32
K- 07 40 46 02	G 1	48,7	58	40
K- 07 40 46 03	G 1 1/4	54,0	67	49
K- 07 40 46 04	G 1 1/2	58,9	76	56
K- 07 40 46 05	G 2	62,2	90	68

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.