


# K-KUGELAUSLAUFHAEHNE MS NI

Bibcocks - Nickel-plated brass

**HANSA FLEX**

## Properties

|                           |  |
|---------------------------|--|
| <b>Application</b>        | Water, gaseous and non-corrosive media, compressed air |
| <b>Operating pressure</b> | 15 bar (12 bar at G 1)                                 |
| <b>Temp. range</b>        | -20 °C to +80 °C                                       |
| <b>Seal</b>               | Teflon/NBR   |
| <b>Housing</b>            | Nickel-plated brass                                    |
| <b>Material</b>           | sealing: Teflon/NBR                                    |

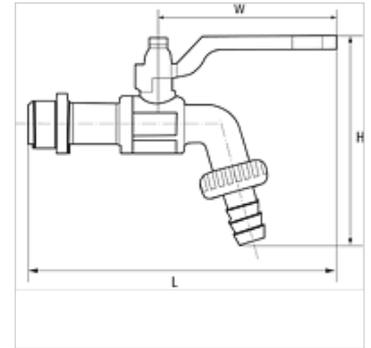

## Note

Further information on request

## Description

With hose connector, thread acc. to ISO 228-1.

## Item

| Identification | DN | Connection | PN (bar) | H (mm) | L (mm) | W (mm) |
|----------------|----|------------|----------|--------|--------|--------|
| K- 07 30 30 33 | 10 | G 3/8 male | 15       | 93,0   | 135,0  | 80,0   |
| K- 07 30 30 29 | 15 | G 1/2 male | 15       | 93,0   | 137,0  | 80,0   |
| K- 07 30 30 31 | 20 | G 3/4 male | 15       | 109,0  | 148,5  | 88,5   |
| K- 07 30 30 27 | 25 | G 1 male   | 12       | 126,0  | 158,0  | 88,5   |