


# K-SCHL-AUFROLLER STANDARD

Hose reel - standard type

**HANSA FLEX**

## Properties

|                       |                              |
|-----------------------|------------------------------|
| Hose material         | Polyurethane (PUR)           |
| Operating temperature | max +40 °C                   |
| Application           | for compressed air and water |
| Swivel angle          | 150°                         |

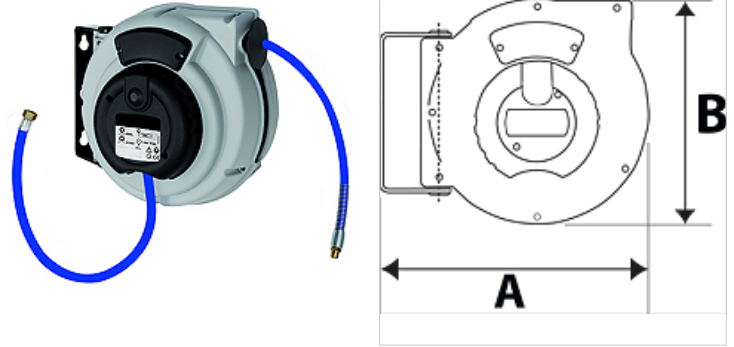

## Note

Further information on request

## Description

Hose reel with automatic rewind and spring assembly. Robust hose locking mechanism, impact resistant plastic casing. Swivel wall mount made made from coated steel. Easy mounting on the wall or ceiling.

## Item

| Identification | Hose size    | A<br>(mm) | B<br>(mm) | Thread outlet | Thread inlet | Max. working pressure<br>(bar) | Hose lenght<br>(m) |
|----------------|--------------|-----------|-----------|---------------|--------------|--------------------------------|--------------------|
| K- 07 10 11 03 | 12 mm x 8 mm | 325,0     | 275,0     | G 1/4 AG      | G 1/4 fem    | 10                             | 9                  |
| K- 07 10 11 04 | 12 mm x 8 mm | 355,0     | 315,0     | G 1/4 AG      | G 1/4 fem    | 15                             | 12                 |