
K-SCHL-AUFROLLER STANDARD


Hose reel - standard type

HANSA FLEX

Properties

Hose material	Polyurethane (PUR)
Operating temperature	max +40 °C
Application	for compressed air and water
Swivel angle	150°



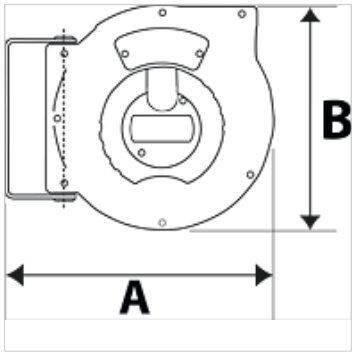

Note

Further information on request

Description

Hose reel with automatic rewind and spring assembly. Robust hose locking mechanism, impact resistant plastic casing. Swivel wall mount made made from coated steel. Easy mounting on the wall or ceiling.

Item

Identification	Hose size	A (mm)	B (mm)	Thread outlet	Thread inlet	Max. working pressure (bar)	Hose lenght (m)
K- 07 10 11 03	12 mm x 8 mm	325,0	275,0	G 1/4 AG	G 1/4 fem	10	9
K- 07 10 11 04	12 mm x 8 mm	355,0	315,0	G 1/4 AG	G 1/4 fem	15	12

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.