
3 BKR ND L

3-way ball valve in low pressure design

Properties

Connection 1 - 3	BSP cylindrical internal threads
Sealing form 1 - 3	Shape A
Bore	L shaped
Contact travel	0°; 90°
Temp. range	Water: 0 °C to +150 °C Air: - 20 °C to + 150 °C
Surface	nickel plated
Material	Brass housing Aluminium handle Brass ball, hard chrome-plated PTFE ball seal



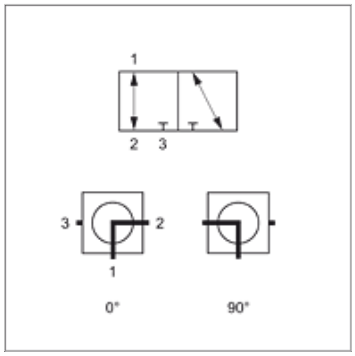

Ordering information

Other pressure and temperature figures available on request.

Item

Identification	DN*	Connecting thread	Operating pressure (bar)
3 BKR 06 ND L	6	G 1/4" -19	25,0
3 BKR 10 ND L	10	G 3/8" -19	25,0
3 BKR 13 ND L	12	G 1/2" -14	25,0
3 BKR 20 ND L	19	G 3/4" -14	25,0
3 BKR 25 ND L	25	G 1" -11	25,0
3 BKR 32 ND L	31	G 1.1/4" -11	25,0
3 BKR 40 ND L	38	G 1.1/2" -11	25,0
3 BKR 50 ND L	50	G 2" -11	25,0

DN = Nominal diameter, nominal width

Spare parts

ND GRIFF	Handle for ND ball valve

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.