

# 3 BKR ND L

3-way ball valve in low pressure design

**HANSA FLEX**

## Properties

**Connection 1 - 3** BSP cylindrical internal threads

**Sealing form 1 - 3** Shape A


**Bore** L shaped

**Contact travel** 0°; 90°

**Temp. range** Water: 0 °C to +150 °C  
Air: - 20 °C to + 150 °C

**Surface** nickel plated

**Material** Brass housing  
Aluminium handle  
Brass ball, hard chrome-plated  
PTFE ball seal

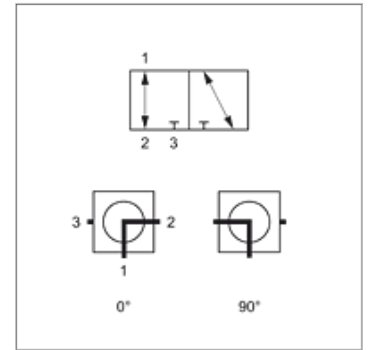

## Ordering information

Other pressure and temperature figures available on request.

## Item

Identification	DN*	Connecting thread	Operating pressure (bar)
3 BKR 06 ND L	6	G 1/4" -19	25,0
3 BKR 10 ND L	10	G 3/8" -19	25,0
3 BKR 13 ND L	12	G 1/2" -14	25,0
3 BKR 20 ND L	19	G 3/4" -14	25,0
3 BKR 25 ND L	25	G 1" -11	25,0
3 BKR 32 ND L	31	G 1.1/4" -11	25,0
3 BKR 40 ND L	38	G 1.1/2" -11	25,0
3 BKR 50 ND L	50	G 2" -11	25,0

DN = Nominal diameter, nominal width

## Spare parts

**ND GRIFF** Handle for ND ball valve