

# BKR ND

2-way ball valve in low pressure design

**HANSA FLEX**

## Properties


**Connection 1 + 2** BSP cylindrical internal threads

**Contact travel** 0°; 90°

**Temp. range** Air: - 20 °C to + 150 °C  
Water: 0 °C to +150 °C

**Surface** nickel plated

**Material** Brass housing  
Aluminium handle  
Brass ball, hard chrome-plated  
PTFE ball seal

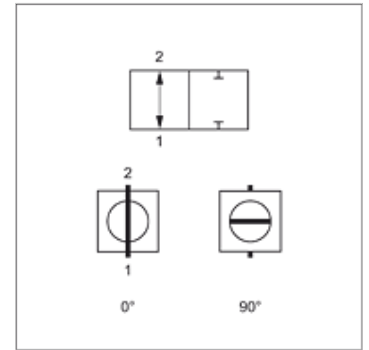

## Note

The pressure figures are applicable for temperatures from 0 °C to +25 °C; at higher temperatures, pressure reductions must be taken into account.

## Ordering information

Other pressure and temperature figures available on request.

## Item

| Identification | DN* | Connecting thread | Operating pressure (bar) |
|----------------|-----|-------------------|--------------------------|
| BKR 06 ND      | 6   | G 1/4" -19        | 50,0                     |
| BKR 10 ND      | 10  | G 3/8" -19        | 50,0                     |
| BKR 13 ND      | 12  | G 1/2" -14        | 50,0                     |
| BKR 20 ND      | 19  | G 3/4" -14        | 40,0                     |
| BKR 25 ND      | 25  | G 1" -11          | 40,0                     |
| BKR 32 ND      | 31  | G 1.1/4" -11      | 30,0                     |
| BKR 40 ND      | 38  | G 1.1/2" -11      | 30,0                     |
| BKR 50 ND      | 51  | G 2" -11          | 25,0                     |
| BKR 65 ND      | 65  | G 2.1/2" -11      | 18,0                     |
| BKR 75 ND      | 76  | G 3" -11          | 16,0                     |
| BKR 100 ND     | 100 | G 4" -11          | 14,0                     |

DN = Nominal diameter, nominal width

## Spare parts

**ND GRIFF** Handle for ND ball valve