


# BKR ND K

2-way ball valve in low pressure design

**HANSA FLEX**

## Properties

<b>Construction</b>	Compact type with T- handle
<b>Connection 1 + 2</b>	BSP cylindrical internal threads
<b>Contact travel</b>	0°; 90°
<b>Temp. range</b>	Air: - 20 °C to + 150 °C Water: 0 °C to +150 °C
<b>Surface</b>	nickel plated
<b>Material</b>	Brass housing Aluminium handle Brass ball, hard chrome-plated PTFE ball seal

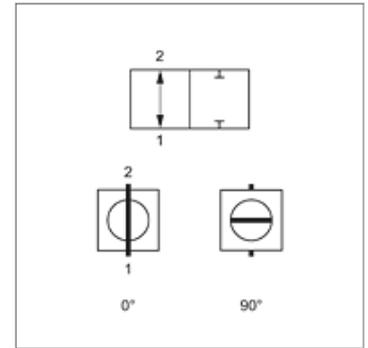

## Note

The pressure figures are applicable for temperatures from 0 °C to +25 °C; at higher temperatures, pressure reductions must be taken into account.

## Ordering information

Other pressure and temperature figures available on request.

## Item

Identification	DN*	Connecting thread	Operating pressure (bar)
BKR 06 ND K	6	G 1/4" -19	50,0
BKR 10 ND K	10	G 3/8" -19	50,0
BKR 13 ND K	12	G 1/2" -14	50,0
BKR 20 ND K	19	G 3/4" -14	40,0
BKR 25 ND K	25	G 1" -11	40,0

DN = Nominal diameter, nominal width – BD = Working pressure