


### Properties

Connection 1 + 2	BSP cylindrical internal threads
Sealing form 1 + 2	for screw-in pins with shapes A, B and if necessary E
Contact travel	0°; 90°
Temp. range	Water: 0 °C to +130 °C Air: - 20 °C to +130 °C
Surface	nickel plated
Material	Brass housing Aluminium handle Brass ball, hard chrome-plated PTFE ball seal

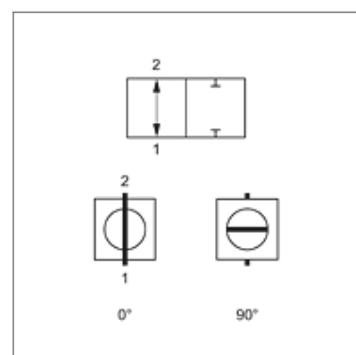

### Note

The pressure figures are applicable for temperatures from 0 °C to +25 °C; at higher temperatures, pressure reductions must be taken into account.

### Description

With longer screw-in thread for pipe fittings to DIN 2353

### Ordering information

Other pressure and temperature figures available on request.

Item	Identification	DN*	Connecting thread	Operating pressure (bar)
<b>BKR 06 ND ROV</b>	6	G 1/4" -19	64,0	
<b>BKR 10 ND ROV</b>	10	G 3/8" -19	64,0	
<b>BKR 13 ND ROV</b>	12	G 1/2" -14	50,0	
<b>BKR 20 ND ROV</b>	19	G 3/4" -14	40,0	
<b>BKR 25 ND ROV</b>	25	G 1" -11	40,0	
<b>BKR 32 ND ROV</b>	31	G 1 1/4" -11	30,0	
<b>BKR 40 ND ROV</b>	38	G 1 1/2" -11	30,0	
<b>BKR 50 ND ROV</b>	51	G 2" -11	25,0	

DN = Nominal diameter, nominal width

### Spare parts

**ND GRIFF** Handle for ND ball valve