
KOMP T
Compressor hose

HANSA-FLEX

Properties

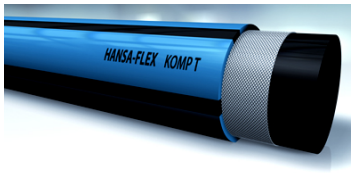

Application	for compressors, in harsh operating conditions in mining, quarrying, construction, shipyards, petrol stations Low pressure range
Standard	DIN 20018, EN ISO 2398
Inner layer	NBR
Insert	synthetic yarn braids
Outer layer	NBR
Colour	black with blue stripes
Temp. min.	-40 °C
Temp. max.	70 °C
Media	Water Compressed air containing oil mist

Item

Identification	Inches	Internal Ø (mm)	External Ø (mm)	Wall thickness (mm)	Operating pressure (bar)	Min. bending radius (mm)
KOMP 19-6 T	3/4"	19	31	6	25,0	95
KOMP 25-7 T	1"	25	39	7	25,0	125

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.